

Figure 3-2. Network Configuration (No PBX)

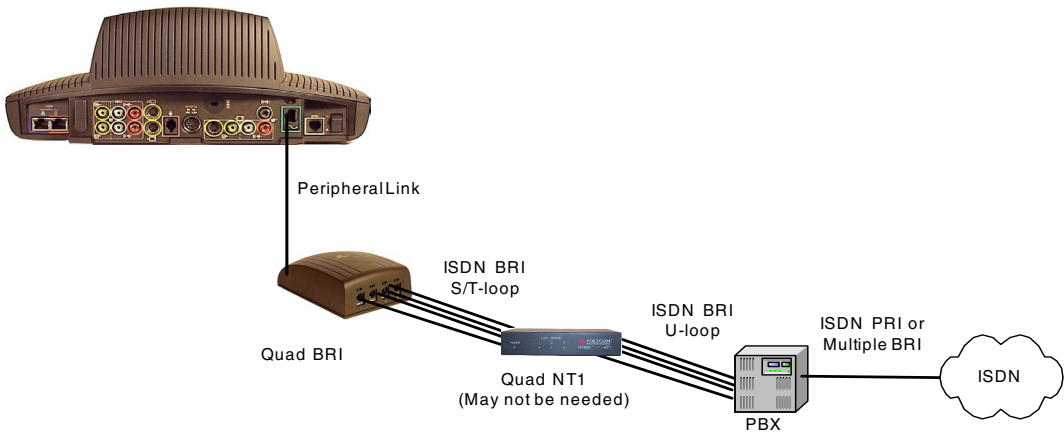


Figure 3-3. Network Configuration (Behind PBX)

For ISDN BRI lines to be used from a PBX to a videoconferencing system, you must do these things in addition to meeting the other requirements.

- ❑ Determine the interface type of the ISDN BRI network module in the PBX (U-loop or S/T-loop). This will determine whether or